

MODEL AT-8600

GROUND DETECTION SYSTEM

- Transmitter and pickup coil for non-intrusive end of shaft mounting
- Detection of a ground fault when insulation resistance drops below a fixed alarm threshold of 10k ohm
- Continuous monitoring of faults while rotating or at stand still
- Built-in self diagnostics, malfunction alarm, and open wire detection enhance operator confidence in proper functioning of system

TYPICAL APPLICATIONS

- Continuous monitoring of rotor ground faults on generators and motors

REDUCING YOUR RISK

The Ground Detection System (GDS) provides reliable, continuous, wireless detection of insulation faults on the field windings of brushless generators and motors. Advanced ground fault measurement techniques combined with the latest innovations in digital telemetry detect field ground faults before a catastrophic failure occurs, reducing the risk of unscheduled outages and allowing predictive maintenance procedures to be performed. Undetected field ground faults can result in severe damage to rotor insulation and forgings. Such faults can lead to costly rotor repairs and prolonged forced outages. The GDS provides operators with a valuable tool for early detection of these faults. With the GDS, maintenance can be performed at scheduled outages, allowing implementation of a back-up plan prior to shutdown.

The system connects to the field negative terminal and the shaft ground to measure the insulation resistance of the field winding. Unlike other ground detectors, the alarm threshold always represents a fixed level of fault severity and does not change with fault location or excitation voltage. LED diagnostic indicators and self-test capabilities enhance operator confidence in the proper functioning of the system. The AT-8600 Ground Detection System gives operators of generators or synchronous motors with brushless exciters peace of mind and the assurance that a ground fault is not causing hidden damage that could lead to an unexpected and costly long-term outage.

SPECIFICATIONS	
Performance	
Rotor Connections	Field Negative Terminal
	Rotor Earth/Ground
Field Voltage	
Measurement Range	0 to 750 VDC
Maximum Transient without Damage	1500 V for 5 seconds
Receiver Output Indicators	
Alarms	Ground Fault and optional System Malfunction, 2-Form C relay 6 A / 250 VAC contacts
LEDs	LED Indicators to aid in identifying a ground fault, malfunction, or self-diagnostic status
Power	100–200 VAC, 50/60 Hz, or 24 VDC
Receiver Alarm Outputs	
Ground Detection	Alarms when insulation resistance falls below 10k ohm ($\pm 10\%$) User-adjustable alarm delay from 5 seconds to 22 seconds
Malfunction	Alarms when there is a loss of power, failure of receiver, loss of data, open wire detection
Alarm Interfaces	Form C relay 6 A / 250 VAC
Environment	
Ambient Temperature	-40 °F to 194 °F (-40 °C to 90 °C) at Transmitter Module/Pickup Assembly -40 °F to 140 °F (-40 °C to 60 °C) at Receiver Unit
Axial Travel	± 0.25 in (± 6.5 mm) from nominal operating position
Rotor Speed	0 to 3600 RPM nominal; 4320 RPM Max




Pickup Coil

Supplied with 2-meter coaxial cable length



Rotor-mounted Transmitter

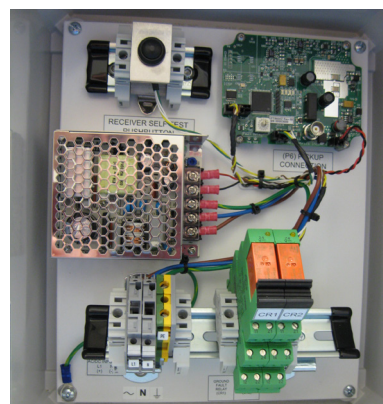

Receiver in NEMA 4 Enclosure



6 British American Boulevard Suite 103-F, Latham, NY 12110 USA

Toll-Free in the USA: 888 684 0012

Phone: 1 518 393 2200 | Email: telemetry@pcb.com

Accumetrics, Inc. provides digital telemetry systems used in a variety of applications such as aerospace, marine, defense, agriculture, transportation, milling operations, energy, and power generation. Systems transmit sensor data from rotating structures using wireless techniques, preserving the integrity of the data even in environments with high levels of electromagnetic interference. Measurement solutions range from single channel products, such as strain gage torque measurements, to advanced custom multichannel systems. Accumetrics, Inc. is a subsidiary of PCB Piezotronics, Inc., and PCB is a wholly owned subsidiary of MTS Systems Corporations.

© 2019 Accumetrics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLine™ is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States. All other trademarks are property of their respective owners.

DS-0169-revA-0619



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.